Author: Mik Andersen Thursday, November 25, 2021

Identification of patterns in covid-19 vaccines: nanorouters 2/2

Circuit self-assembly

Although it seems impossible, the self-assembly of circuits is a possibility to consider in the hypothesis that has been explained. According to (Huang, J .; Momenzadeh, M .; Lombardi, F. 2007) "Recent developments in QCA manufacturing (involving molecular implementations) have substantially changed the nature of processing. At very small feature sizes, it is anticipated self-assembly or large-scale cell deposition on isolated substrates will be used. In these implementations, QCA cells (each composed of two dipoles) are laid out in parallel V-shaped tracks. QCA cells are arranged in a dense pattern and the computation occurs between adjacent cells. These fabrication techniques are well suited for molecular implementation. " However, there are also other methods, such as DNA nanopatterns (Hu, W .; Sarveswaran, K .; Lieberman, M .; Bernstein, GH 2005), with which a template is created for the alignment of the quantum dots of graphene, forming the QCA cells, thereby generating the aforementioned circuitry, see figure 10.

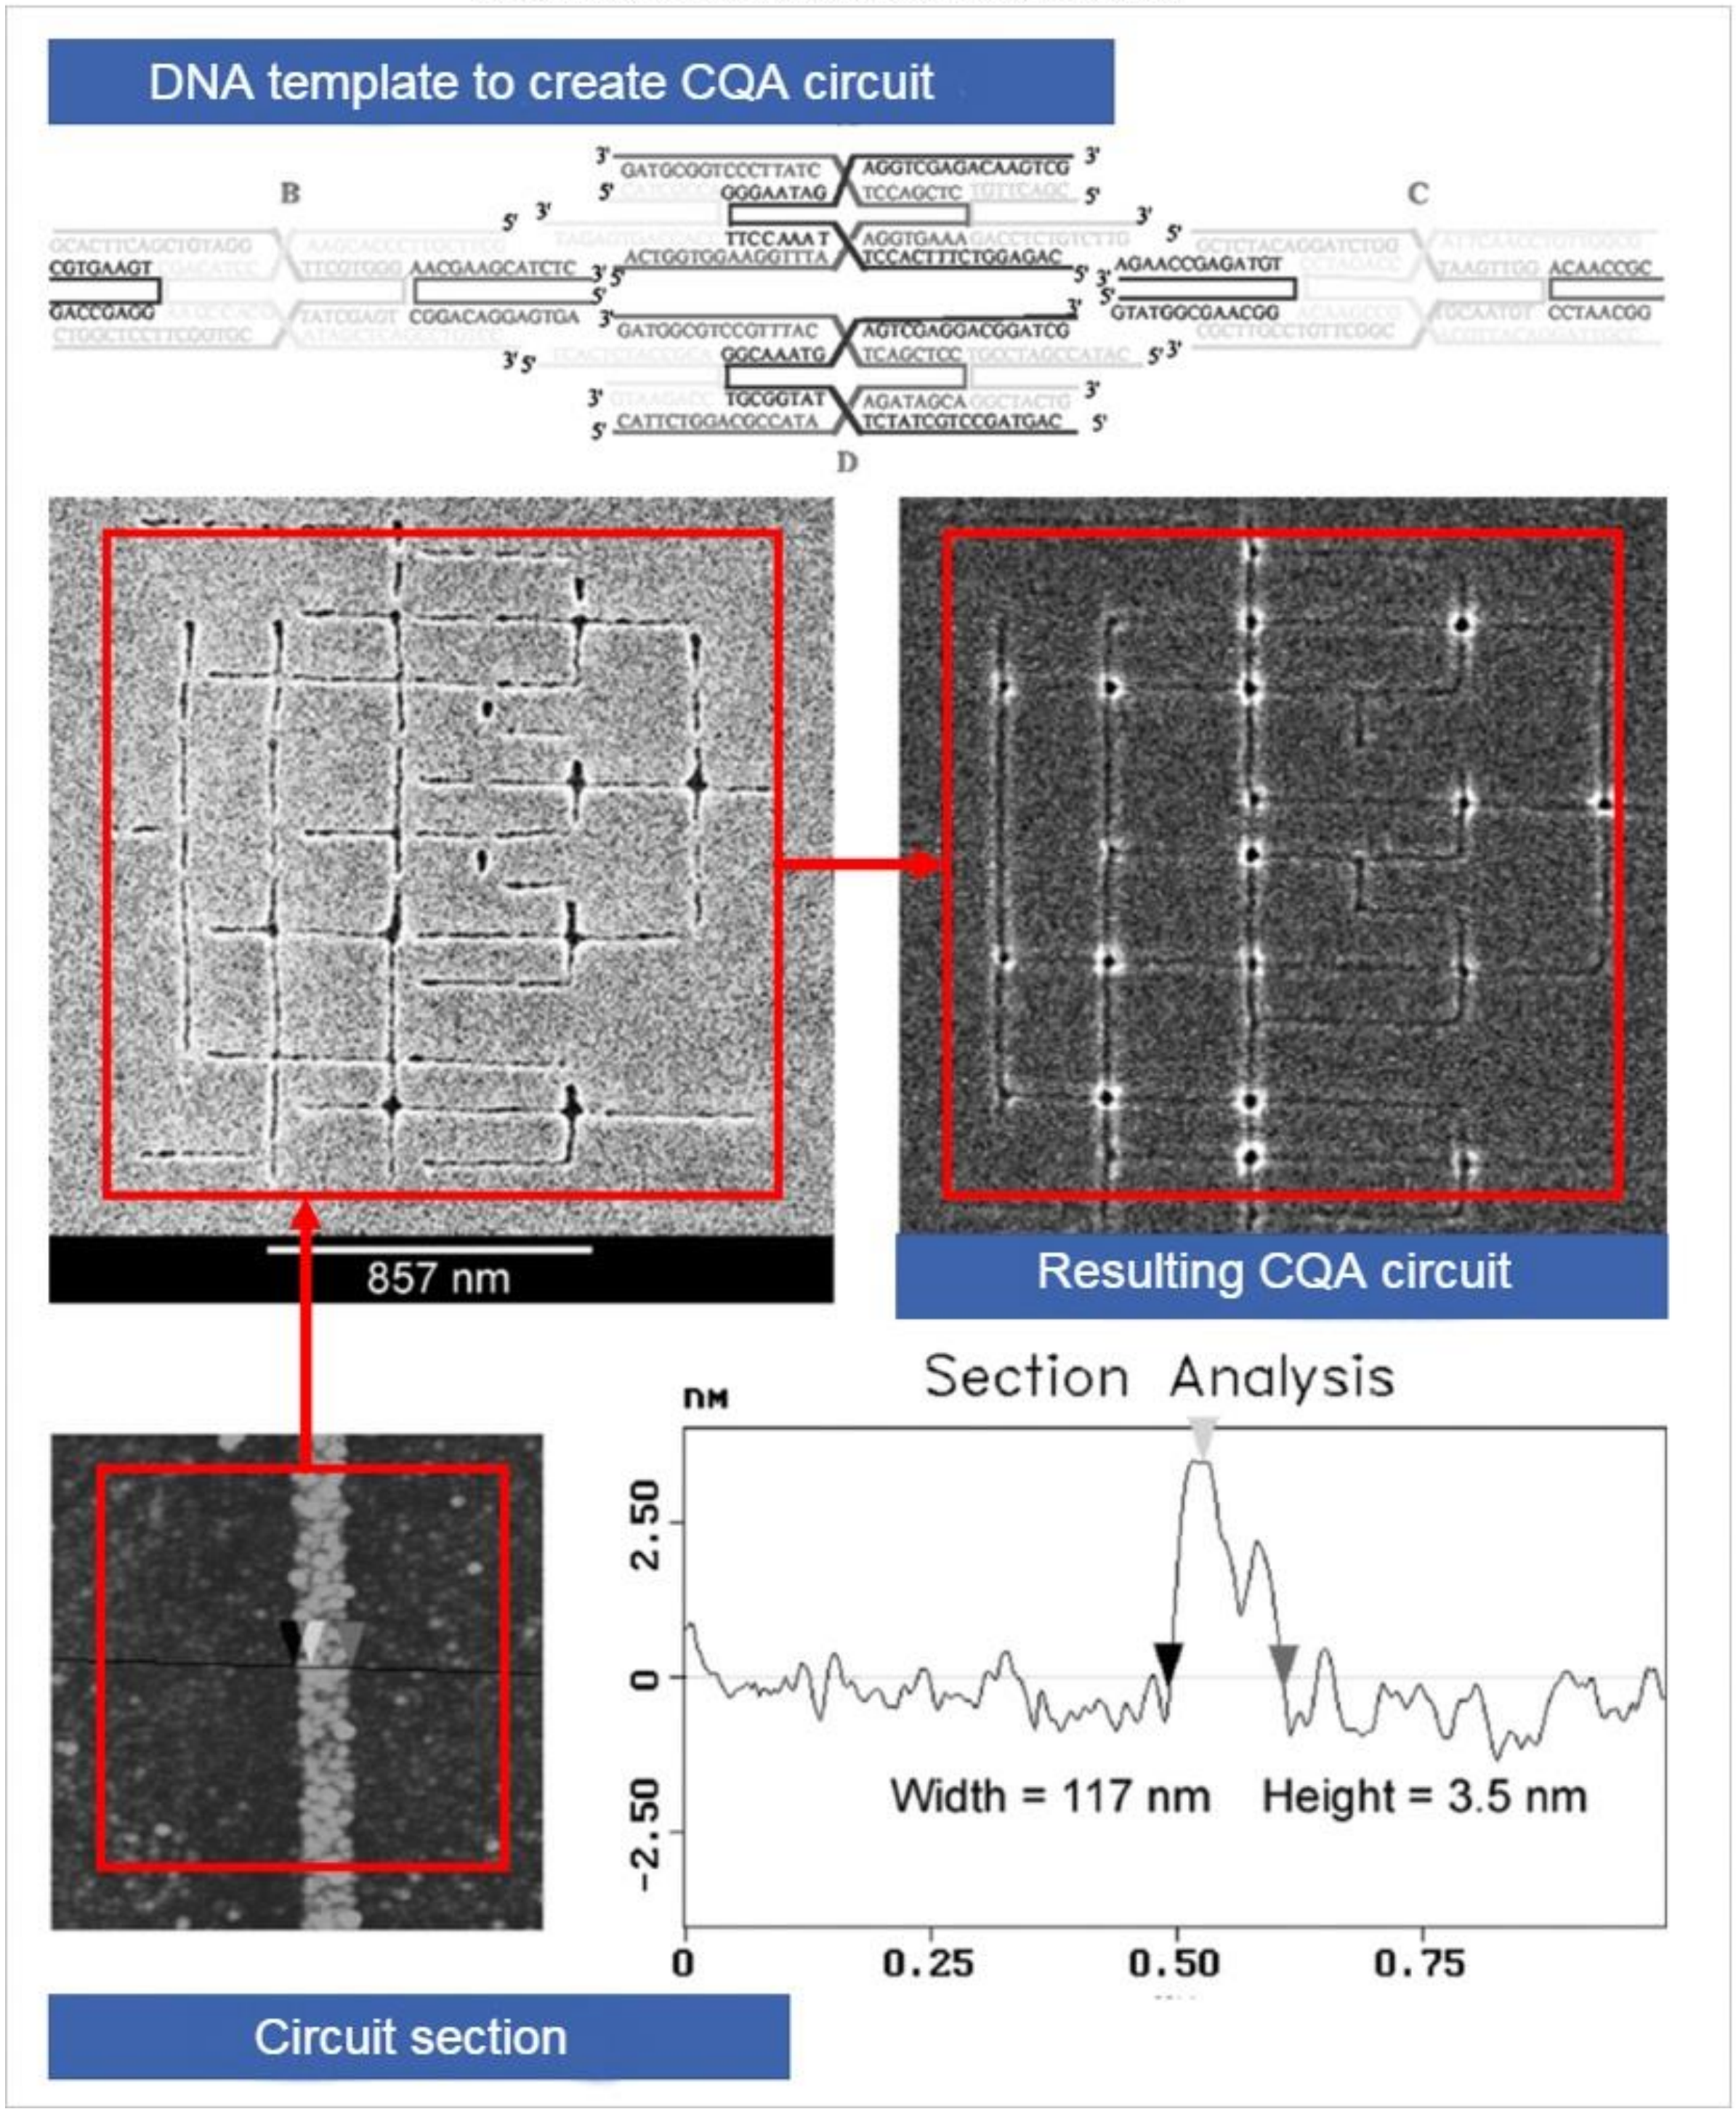

Fig. 10. Self-assembly of a circuit with quantum dots from a DNA pattern. The lines of the circuit cables are very similar to those observed in the vaccine sample, see figures 2 and 3. (Hu, W .; Sarveswaran, K .; Lieberman, M .; Bernstein, G.H. 2005)

According to (Hu, W .; Sarveswaran, K .; Lieberman, M .; Bernstein, GH 2005) "Four-tile DNA rafts have been successfully synthesized and characterized by the gel electrophoresis method in our previous work" according to the work of (Sarveswaran, K. 2004). This fits with the very possible existence of a gel / hydrogel in the vaccine composition, after the doctor's micro-Raman analysis (Campra, P. 2021) in which peaks with values close to 1450 were obtained, which could correspond to PVA, PQT-12, polyolefin, polyacrylamide or polypyrrole, all of them components recognized in the scientific literature as gels and derivatives. On the other hand, the electrophoresis method, or what is the same, the electrical polarization process that causes teslaphoresis, is explicitly alluded to on carbon nanotubes, graphene, quantum dots and other semiconductors, as described (Bornhoeft, LR; Castillo, AC; Smalley, PR; Kittrell, C .; James, DK; Brinson, BE; Cherukuri, P. 2016) in their research. This would confirm that teslaphoresis plays a fundamental role in the composition of circuits, along with DNA patterns. If this is confirmed, it would mean that the circuits could self-assemble in the presence of electric fields or even the reception of electromagnetic waves (microwave EM). The study by (Pillers, M .; Goss, V .; Lieberman, M. 2014) also confirms the construction of nanostructures and CQA using in this case graphene, graphene oxide (GO), electrophoresis and gel, causing controlled deposition in the areas indicated by the DNA pattern, reproducing results similar to those presented in the study by Hu and Sarveswaran, thus making it possible to create the electronic circuits already mentioned, see figure 11.

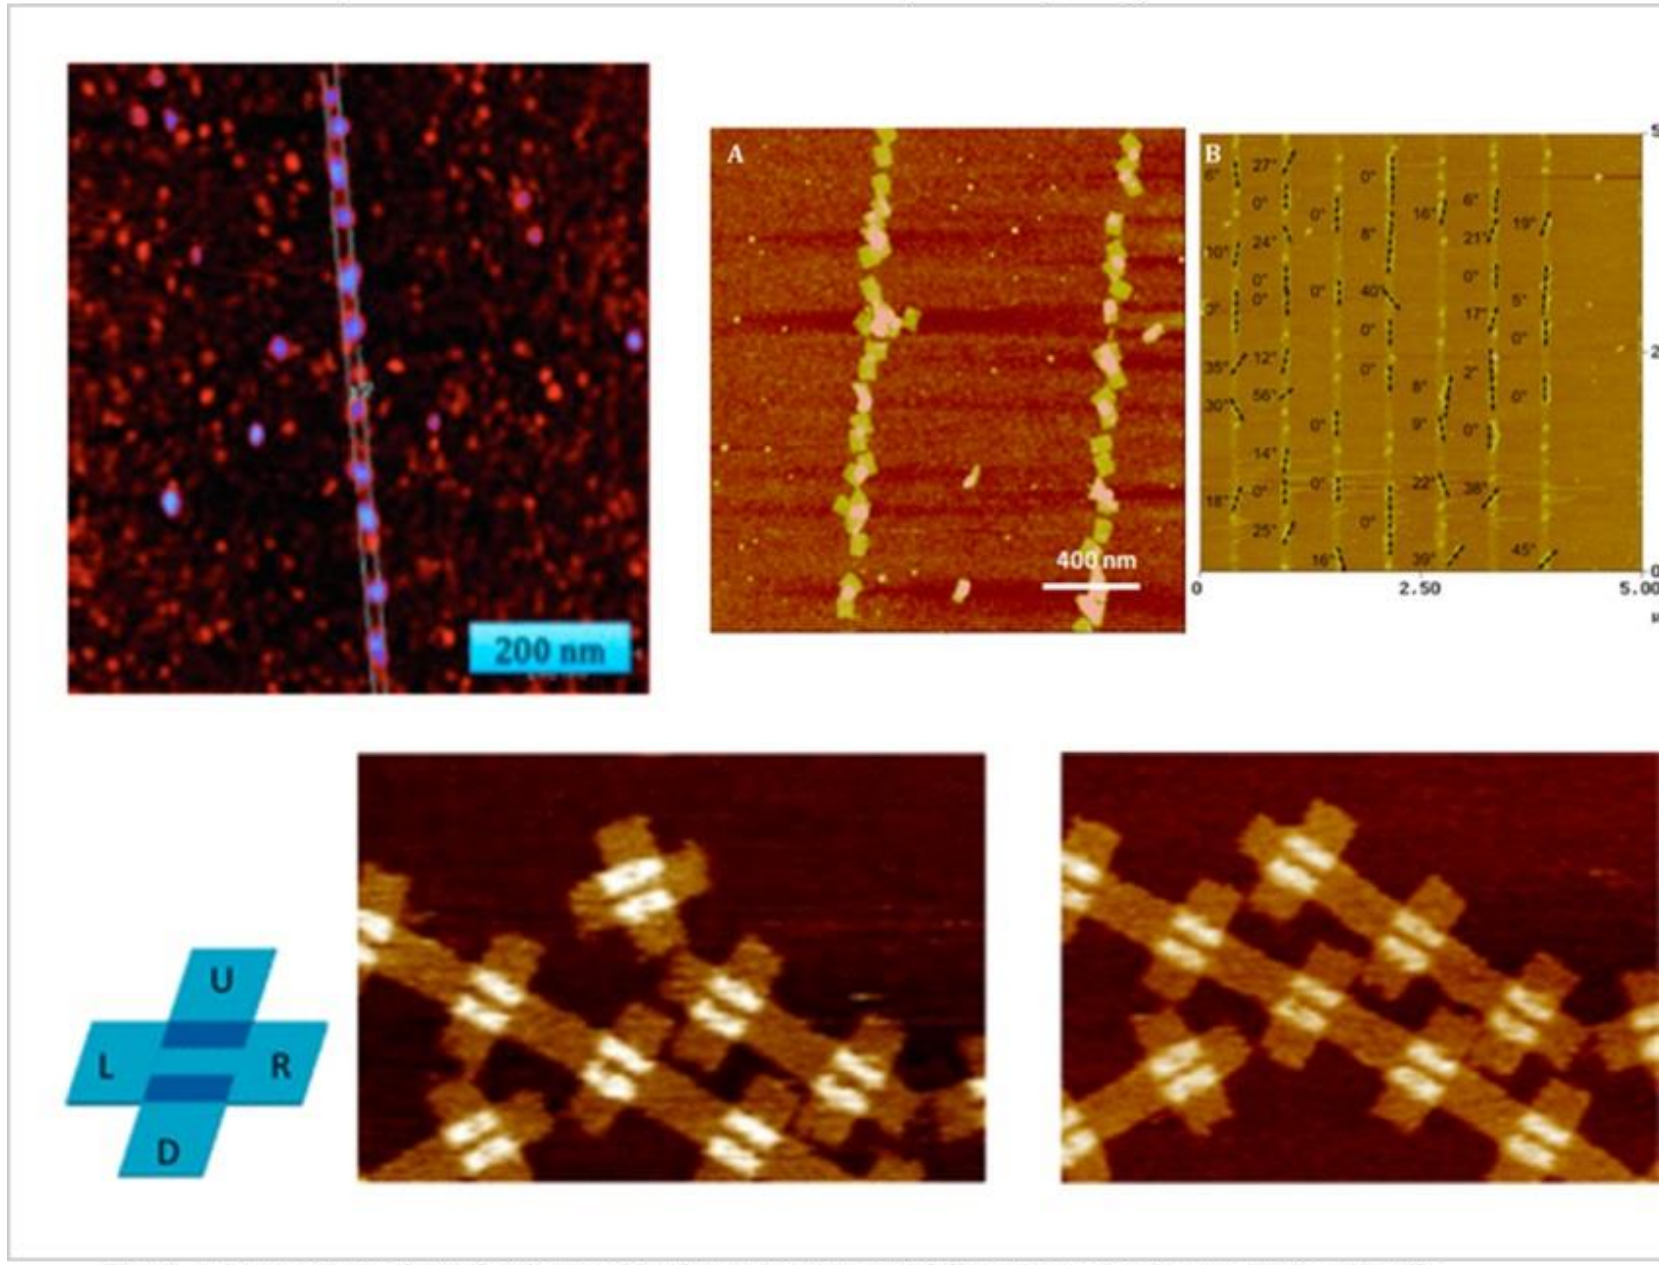

Fig. 11. Advances in the field of self-assembly of quantum dots and QCA cells can be observed in the scientific literature using the DNA template method to mark the order of construction and electrophoresis to initiate or trigger the process in the materials of the solution. (Pillers, M .; Goss, V .; Lieberman, M. 2014)

Plasmonic nano-emitters

Another issue that requires an explanation in the discovery of the circuit of a nanorouter, in the vaccine sample, is its location in what appears to be a quadrangular crystal. Although it could be thought that it is a randomly generated form, the bibliographic review reveals and justifies this type of form that serves as a framework for this type of circuit. In reality it is a "plasmonic nano-emitter", in other words, it would correspond to a cubic-shaped nano-antenna (single crystal) of variable size on the nano-micrometric scale, which can emit, receive or repeat signals. This is possible through the plasmon activation property of its surface (that of the nanoemitter cube) that is locally excited to generate an oscillatory signal, as explained (Ge, D .; Marguet, S .; Issa, A .; Jradi, S .; Nguyen, TH; Nahra, M .; Bachelot, R. 2020), see figure 12. This agrees with the type of TS-OOK signals, which are transmitted through the intra-body nanocommunication network, being a requirement indispensable for a nano-router, to have a method to capture them. In other words, the crystalline cube acts as a transceiver for the nanorouter, due to its special properties, derived from the physics of the plasmon. This is corroborated when the scientific literature on electromagnetic nano-networks for the human body is consulted (Balghusoon, AO; Mahfoudh, S. 2020), the MAC protocols applied to the case (Jornet, JM; Pujol, JC; Pareta, JS 2012), the methods for the debugging of errors in the signals (Jornet, JM; Pierobon, M .; Akyildiz, IF 2008), or the modulation of pulses in femtoseconds in the terahertz band for nano-communication networks (Jornet, JM; Akyildiz, IF 2014), the parameterization of nano-networks for their perpetual operation (Yao, XW; Wang, WL; Yang, SH 2015), the performance in the modulation of wireless signals for nano-networks (Zarepour, E .; Hassan, M .; Chou, CT; Bayat, S. 2015). In all cases, nano-transceivers are essential to be able to receive or emit a TS-OOK signal.

samples of scientific literature

Samples of Vaccine

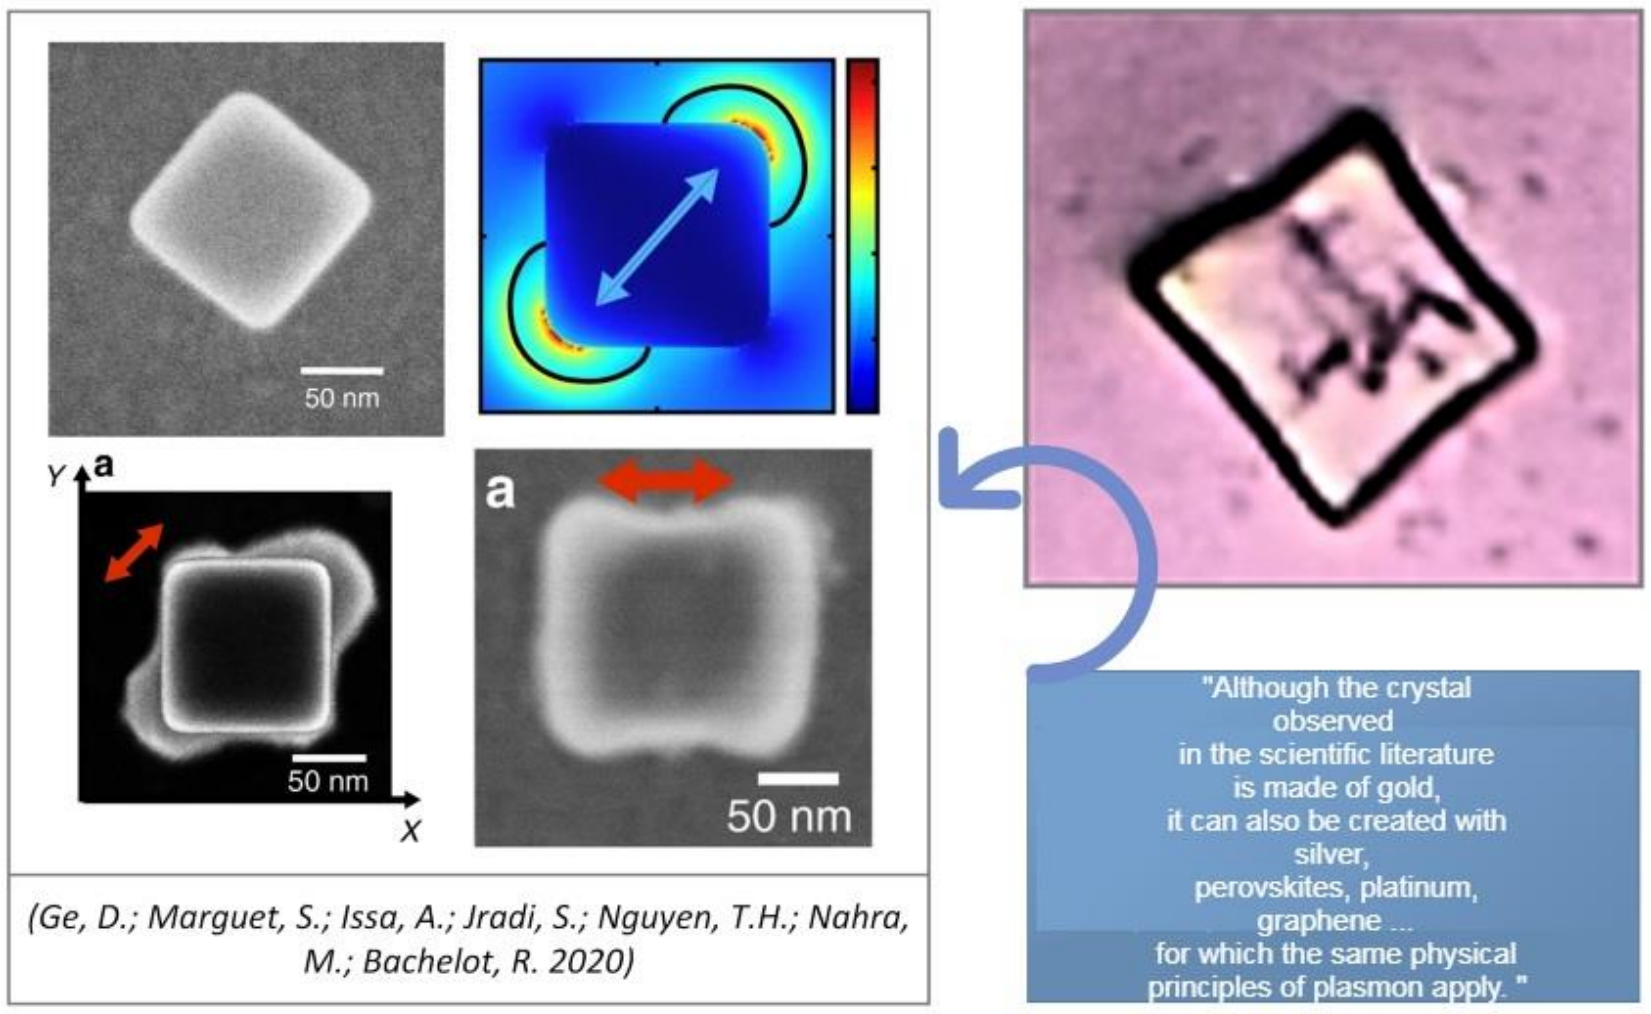

(Ge, D.; Marguet, S.; Issa, A.; Jradi, S.; Nguyen, T.H.; Nahra, M.; Bachelot, R. 2020)

"Although the crystal observed in the scientific literature is made of gold, it can also be created with silver, perovskites, platinum, graphene ... for which the same physical principles of plasmon apply. "

Fig. 12. Nano-micrometric scale crystals can play the role of antenna or transceiver, which makes it possible to imagine that finding the circuit in a quadrangular structure is not the product of chance. (Ge, D .; Marguet, S .; Issa, A .; Jradi, S .; Nguyen, T.H .; Nahra, M .; Bachelot, R. 2020)

Plasmonic nano-emitters can acquire cube shape, which would be the case observed in the vaccine sample, but also spherical and discoidal shape, being able to be self-assembled, to form larger nano-microstructures (Devaraj, V .; Lee, JM; Kim , YJ; Jeong, H .; Oh, JW 2021). Among the materials with which this plasmonic nano-emitter could be produced are gold, silver, perovskites and graphene, see (Oh, DK; Jeong, H .; Kim, J .; Kim, Y .; Kim, I .; Ok, JG; Rho, J. 2021 | Hamedi, HR; Paspalakis, E .; Yannopapas, V. 2021 | Gritsienko, AV; Kurochkin, NS; Lega, PV; Orlov, AP; Ilin, AS; Eliseev, SP; Vitukhnovsky , AG 2021 | Pierini, S. 2021), although it is likely that many others can be used.

CAM and TCAM memory for MAC and IP

If the presence of nanorouters in vaccines is considered, the hypothesis of the existence of one or more MAC addresses (fixed or dynamic) could be confirmed, which could be emitted from vaccinated people or through some other intermediary device (for example a mobile phone). This approach is in line with what has already been explained and evidenced in this publication, but also according to scientific publications on nano-communication networks for the human body. According to (Abadal, S .; Liaskos, C .; Tsioliaridou, A .; Ioannidis, S .; Pitsillides, A .; Solé-Pareta, J .; Cabellos-Aparicio, A. 2017) these MAC addresses allow the nano-The network can transmit and receive data, because the individual has a unique identifier that allows him to access the medium, that is, the Internet. In this way, the nano-router can receive the signals corresponding to the data from the nano-sensors and nano-nodes of the nano-network to transmit them to the outside of the body, as long as there is a mobile device nearby, which serves gateway to the Internet. Therefore, the hypothesis is feasible that MAC addresses of vaccinated people can be observed (by means of bluetooth signal tracking applications), when there is some type of interaction with the mobile media that act as a link. This does not mean that there is permanent communication, due to the need to save and optimize energy consumption (Mohrehkesh, S .; Weigle, MC 2014 | Mohrehkesh, S .; Weigle, MC; Das, SK 2015), which could explain intermittence in communications, periods of connection and inactivity.

The novelty in the field of MAC addresses, which comes together with the QCA circuits, with which nanorouters can be developed, is that memory circuits can also be created. The same researchers (Sardinha, LH; Silva, DS; Vieira, MA; Vieira, LF; Neto, OPV 2015) developed a new type of CAM memory that "unlike random access memory (RAM), which returns data which are stored at the given address. CAM, however, receives the data as input and returns where the data can be found. CAM is useful for many applications that need fast searches, such as Hought transforms, Huffman encoding, Lempel-compression. Ziv and network switches to map MAC addresses to IP addresses and vice versa. CAM is most useful for creating tables that look for exact matches, such as MAC address tables. " This statement was extracted and copied verbatim to highlight that QCA circuits are the answer to the storage and management of MAC addresses for data transmission in nano-networks, which would confirm that vaccines are, among other things, a means of installing hardware for the control, modulation and monitoring of people.

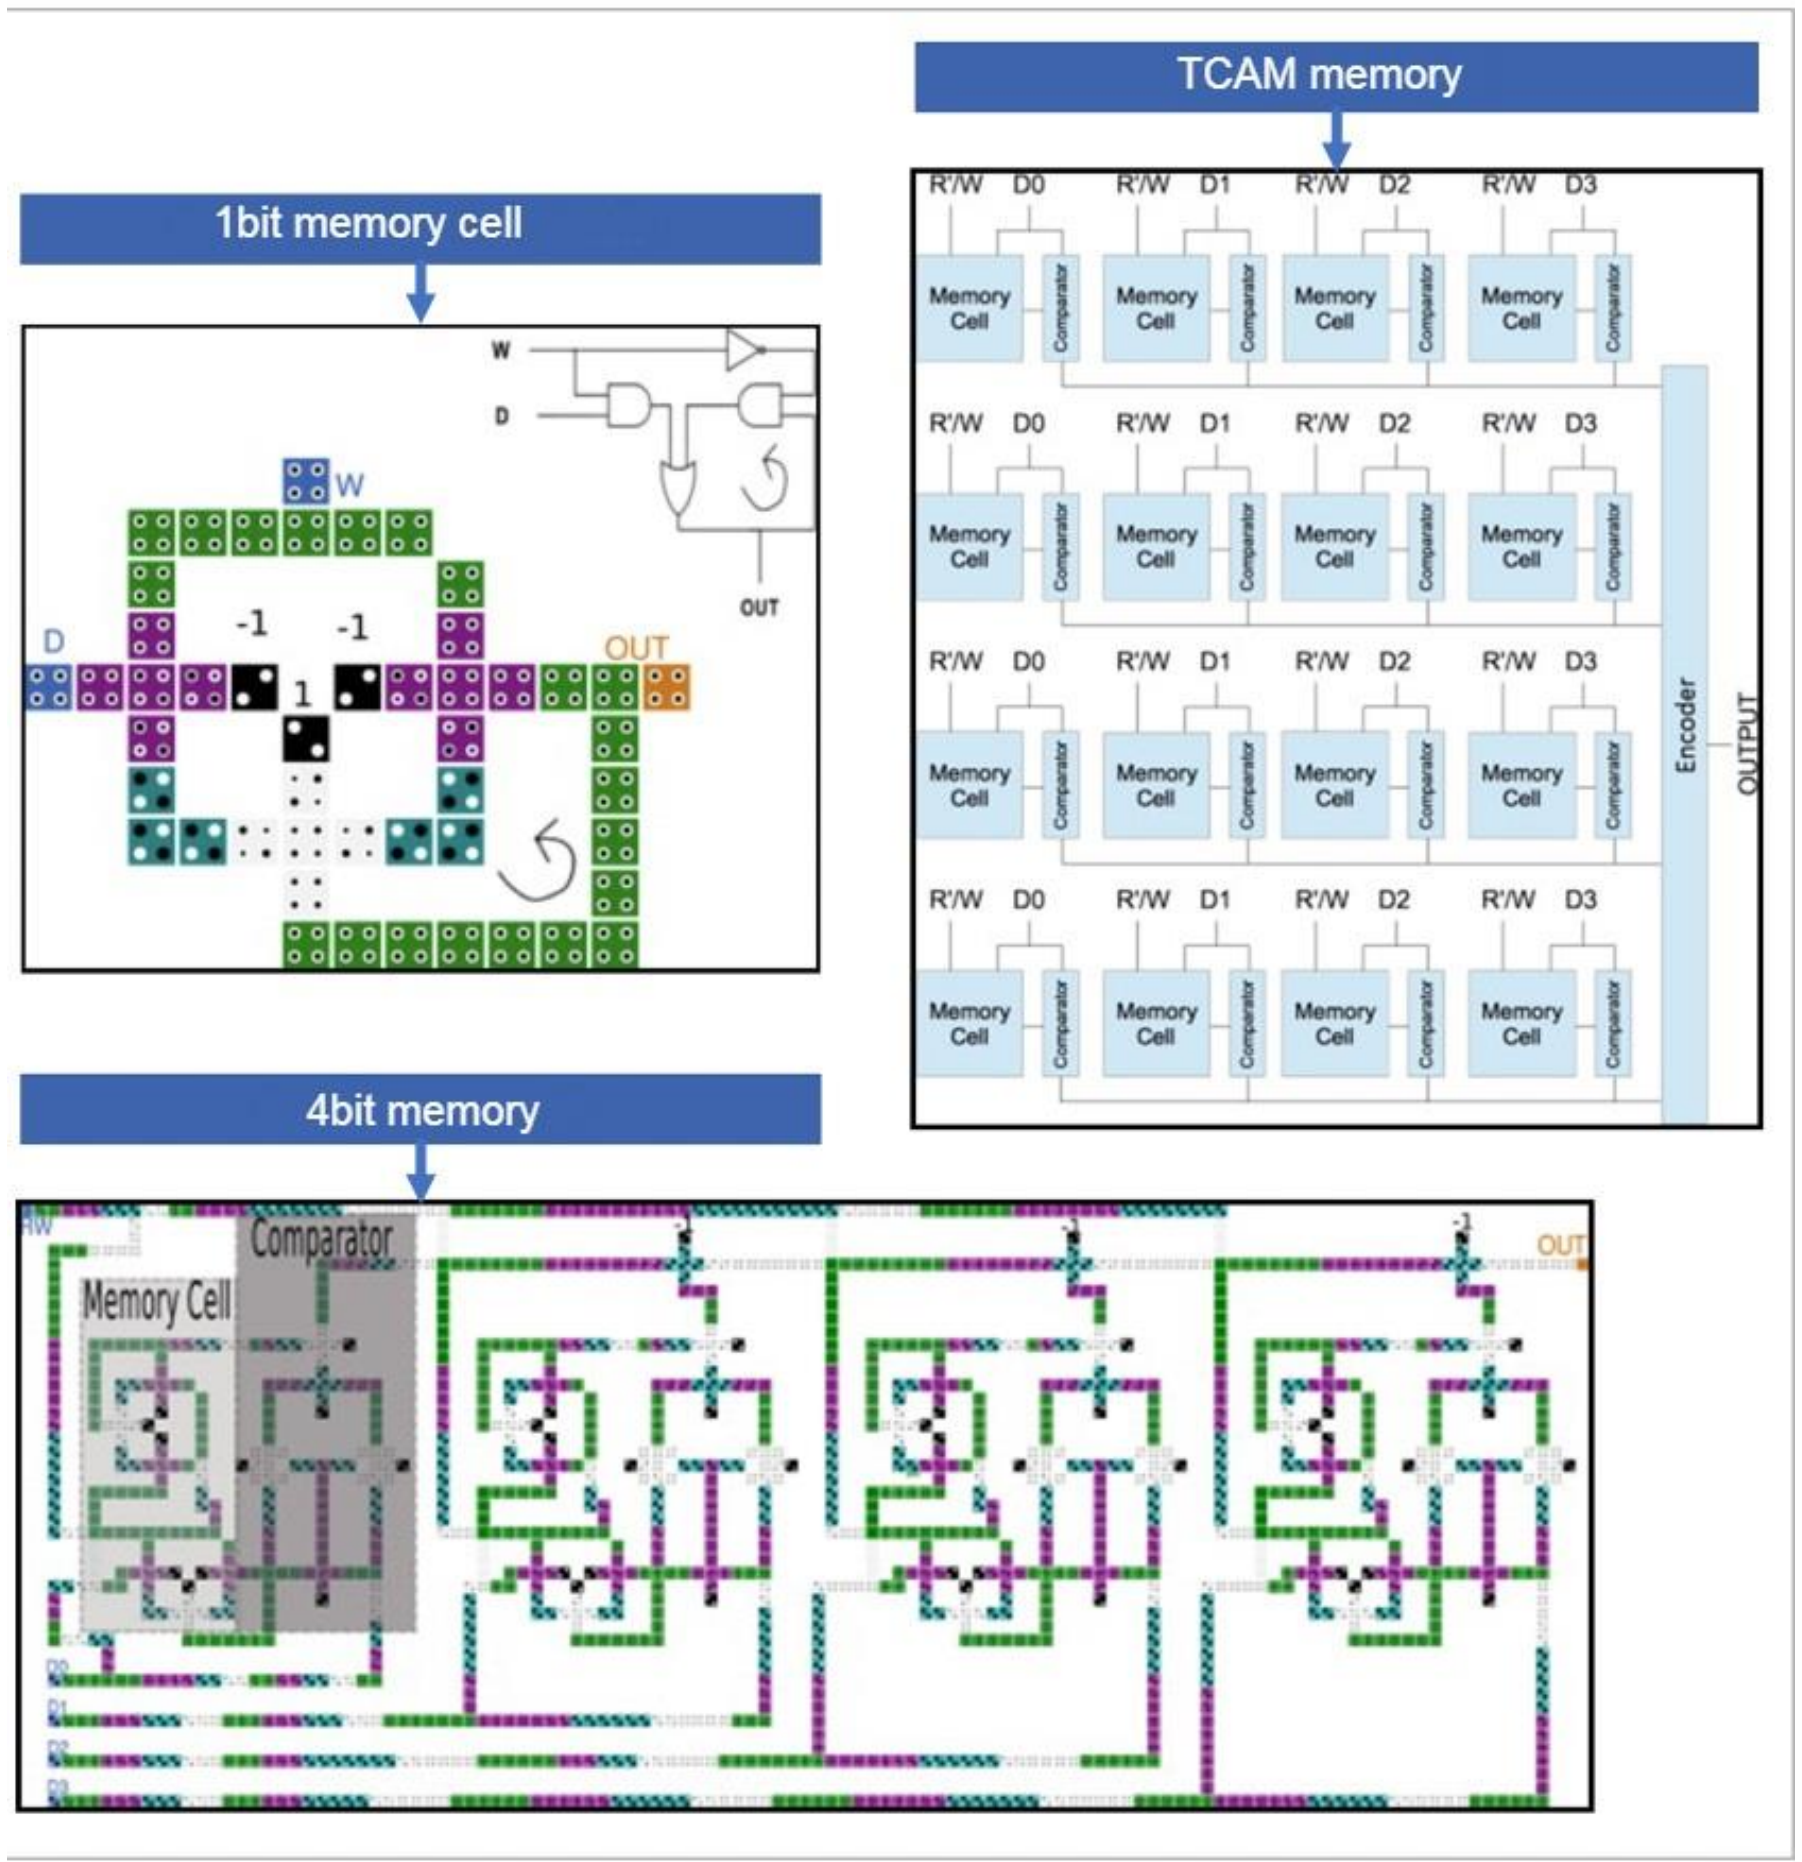

Fig. 13. Memory circuits for the storage of MAC and IP addresses made with the same QCA technology of the nanorouter observed in the Pfizer vaccine samples. (Sardinha, L.H .; Silva, D.S .; Vieira, M.A .; Vieira, L.F .; Neto, O.P.V. 2015)

Additionally, (Sardinha, LH; Silva, DS; Vieira, MA; Vieira, LF; Neto, OPV 2015) also developed the TCAM memory, which is a special type of CAM memory that would be useful to "create tables to search for longer matches such as IP routing tables organized by IP prefixes. To reduce latency and make communication faster, routers use TCAM. " This statement clearly affects its use in nano-routers in order to be able to transmit the data obtained in the nano-network to a specific recipient server accessible on the Internet. In other words, the data collected by the nano-network should be stored / registered in a database, of which the recipient of the vaccine would not be aware of its existence, of which it was not informed, and in the It is unknown what information is used.

Bibliography

1. Akyildiz, I.F.; Jornet, J.M. (2010). Redes de nanosensores inalámbricos electromagnéticos = Electromagnetic wireless nanosensor networks. Nano Communication Networks, 1(1), pp. 3-19. https://doi.org/10.1016/j.nancom.2010.04.001

2. Al-Turjman, F. (2020). Inteligencia y seguridad en un gran IoNT orientado a 5G: descripción general = Intelligence and security in big 5G-oriented IoNT: An overview. Future Generation Computer Systems, 102, pp. 357-368. https://doi.org/10.1016/j.future.2019.08.009

3. Balasubramaniam, S .; Boyle, N.T .; Della-Chiesa, A .; Walsh, F .; Mardinoglu, A .; Botvich, D .; Prina-Mello, A. (2011). Development of artificial neuronal networks for molecular communication. Nano Communication Networks, 2 (2-3), pp. 150-160. https://doi.org/10.1016/j.nancom.2011.05.004

4. Balghusoon, A.O .; Mahfoudh, S. (2020). Routing Protocols for Wireless Nanosensor Networks and Internet of Nano Things: A Comprehensive Survey. IEEE Access, 8, pp. 200724-200748. https://doi.org/10.1109/ACCESS.2020.3035646

5. Beyene, A.G .; Delevich, K .; Del Bonis-O'Donnell, J.T .; Piekarski, D.J .; Lin, W.C .; Thomas, A.W .; Landry, M.P. (2019). Imaging of striatal dopamine release using a non-genetically encoded near-infrared fluorescent catecholamine nanosensor = Imaging striatal dopamine release using a nongenetically encoded near infrared fluorescent catecholamine nanosensor.

6. Bornhoeft, L.R .; Castillo, A.C .; Smalley, P.R .; Kittrell, C .; James, D.K .; Brinson, B.E .; Cherukuri, P. (2016). Teslaphoresis de carbon nanotubes = Teslaphoresis of carbon nanotubes. ACS nano, 10 (4), pp. 4873-4881. https://doi.org/10.1021/acsnano.6b02313

7. Bouchedjera, I.A .; Aliouat, Z .; Louail, L. (2020). EECORONA: Energy Efficiency Coordinate and Routing System for Nanonetworks = EECORONA: Energy Efficiency Coordinate and Routing System for Nanonetworks. In: International Symposium on Modeling and Implementation of Complex Systems. Cham. pp. 18-32. https://doi.org/10.1007/978-3-030-58861-8_2

8. Bouchedjera, I.A .; Louail, L .; Aliouat, Z .; Harous, S. (2020). DCCORONA: Distributed Cluster-based Coordinate and Routing System for Nanonetworks = DCCORONA: Distributed Cluster-based Coordinate and Routing System for Nanonetworks. In: 2020 11th IEEE Annual Ubiquitous Computing, Electronics & Mobile Communication Conference (UEMCON). IEEE. pp. 0939-0945. https://doi.org/10.1109/UEMCON51285.2020.9298084

9. Campra, P. (2021a). Observations of possible microbiotics in COVID RNAm Version 1 vaccines. Http://dx.doi.org/10.13140/RG.2.2.13875.55840

10. Campra, P. (2021b). Detection of graphene in COVID19 vaccines by Micro-RAMAN spectroscopy. researchgate.net/publication/355684360_Deteccion_de_grafeno_en_vacunas_COVID19_por_espectroscopia_Mi

11. Campra, P. (2021c). MICROSTRUCTURES IN COVID VACCINES: ¿inorganic crystals or Wireless Nanosensors rchgate.net/publication/356507702_MICROSTRUCTURES_IN_COVID_VACCINES_inorganic_crystals_or_Wirel

12. Chopra, N.; Phipott, M.; Alomainy, A.; Abbasi, Q.H.; Qaraqe, K.; Shubair, R.M. (2016). THz time domain characterization of human skin tissue for nano-electromagnetic communication. En: 2016 16th Mediterranean Microwave Symposium (MMS) (pp. 1-3). IEEE. https://doi.org/10.1109/MMS.2016.7803787

13. Da-Costa, M.R .; Kibis, O.V .; Portnoi, M.E. (2009). Carbon nanotubes as a basis for terahertz emitters and detectors = Carbon nanotubes as a basis for terahertz emitters and detectors. Microelectronics Journal, 40 (4-5), pp. 776-778. https://doi.org/10.1016/j.mejo.2008.11.016

14. Das, B .; Das, J.C .; From d.; Paul, A.K. (2017). Nano-Router Design for Nano-Communication in Single Layer Quantum Cellular Automata = Nano-Router Design for Nano-Communication in Single Layer Quantum Cellular Automata. In: International Conference on Computational Intelligence, Communications, and Business Analytics (pp. 121-133). Springer, Singapore. https://doi.org/10.1007/978-981-10-6430-2_11

15. Demoustier, S .; Minoux, E .; Le Baillif, M .; Charles, M .; Ziaei, A. (2008). Revisión de dos aplicaciones de microondas de nanotubos de carbono: nano antenas y nanointerruptores nano-switches. Physical Reports, 9 (1), pp. 53-66. https://doi.org/10.1016/j.crhy.2008.01.001

16. Devaraj, V .; Lee, J.M .; Kim, Y.J .; Jeong, H .; Oh, J.W. (2021). [Pre-print]. Designing an Efficient Self-Assembled Plasmonic Nanostructures from Spherical Shaped Nanoparticles. Designing an Efficient Self-Assembled Plasmonic Nanostructures from Spherical Shaped Nanoparticles. International Journal of Molecular Science. https://www.preprints.org/manuscript/202109.0225/v1

17. Dhoutaut, D.; Arrabal, T.; Dedu, E. (2018). Bit Simulator, un simulador de nanorredes electromagnéticas = Bit simulator, an electromagnetic nanonetworks simulator. En: Proceedings of the 5th ACM International Conference on Nanoscale Computing and Communication (pp. 1-6). https://doi.org/10.1145/3233188.3233205

18. Fabbro, A .; Cellot, G .; Prato, M .; Ballerini, L. (2011). Interconnection of neurons with carbon nanotubes: (re) engineering neuronal signaling = Interfacing neurons with carbon nanotubes: (re) engineering neuronal signaling. Progress in brain research, 194, pp. 241-252. https://doi.org/10.1016/B978-0-444-53815-4.00003-0

19. Ferjani, H .; Touati, H. (2019). Data communication in electromagnetic nano-networks for healthcare applications = Data communication in electromagnetic nano-networks for healthcare applications. In: International Conference on Mobile, Secure, and Programmable Networking (pp. 140-152). Springer, Cham. https://doi.org/10.1007/978-3-030-22885-9_13

20. Ge, D .; Marguet, S .; Issa, A .; Jradi, S .; Nguyen, T.H .; Nahra, M .; Bachelot, R. (2020). Hybrid plasmonic nano-emitters with controlled single quantum emitter positioning on the local excitation field. Nature communications, 11 (1), pp1-11. https://doi.org/10.1038/s41467-020-17248-8

21. Gritsienko, A.V.; Kurochkin, N.S.; Lega, P.V.; Orlov, A.P.; Ilin, A.S.; Eliseev, S.P.; Vitukhnovsky, A.G. (2021). Propiedades ópticas de la nueva nanoantena híbrida en cavidad submicrónica = Optical properties of new hybrid nanoantenna in submicron cavity. En: Journal of Physics: Conference Series (Vol. 2015, No. 1, p. 012052). IOP Publishing. https://doi.org/10.1088/1742-6596/2015/1/012052

22. Hamedi, H.R .; Paspalakis, E .; Yannopapas, V. (2021). Effective Control of the Optical Bistability of a Three-Level Quantum Emitter near a Nanostructured Plasmonic Metasurface. In: Photonics (Vol. 8, No. 7, p. 285). Multidisciplinary Digital Publishing Institute. https://doi.org/10.3390/photonics8070285

23. Hu, W .; Sarveswaran, K .; Lieberman, M .; Bernstein, G.H. (2005). High resolution electron beam lithography and DNA nanopatterns for molecular QCA. IEEE Transactions on Nanotechnology, 4 (3), pp. 312-316. https://doi.org/10.1109/TNANO.2005.847034

24. Huang, G .; Huang, H. (2018). Application of dextran as nanoscale drug carriers = Application of dextran as nanoscale drug carriers. Nanomedicine, 13 (24), pp. 3149-3158. https://doi.org/10.2217/nnm-2018-0331

25. Huang, J .; Momenzadeh, M .; Lombardi, F. (2007). Design of sequential circuits by quantum-dot cellular automata = Design of sequential circuits by quantum-dot cellular automata. Microelectronics Journal, 38 (4-5), pp. 525-537. https://doi.org/10.1016/j.mejo.2007.03.013

26. Huang, J .; Xie, G .; Kuang, R .; Deng, F .; Zhang, Y. (2021). QCA-based Hamming code circuit for nano communication networks = QCA-based Hamming code circuit for nano communication network. Microprocessors and Microsystems, 84, 104237. https://doi.org/10.1016/j.micpro.2021.104237

27. John, A.A .; Subramanian, A.P .; Vellayappan, M.V .; Balaji, A .; Mohandas, H .; Jaganathan, S.K. (2015). Carbon nanotubes and graphene as emerging candidates in neuroregeneration and neurodrug delivery = Carbon nanotubes and graphene as emerging candidates in neuroregeneration and neurodrug delivery. International journal of nanomedicine, 10, 4267. https://dx.doi.org/10.2147%2FIJN.S83777

28. Jornet, J.M .; Akyildiz, I.F. (2014). Femtosecond-long pulse-based modulation for terahertz band communication in nanonetworks = Femtosecond-long pulse-based modulation for terahertz band communication in nanonetworks. IEEE Transactions on Communications, 62 (5), p. 1742-1754. https://doi.org/10.1109/TCOMM.2014.033014.130403

29. Jornet, J.M.; Pierobon, M.; Akyildiz, I.F. (2008). Redes de nanocomunicación = Nano Communication Networks. Networks (Elsevier), 52, pp. 2260-2279. http://dx.doi.org/10.1016/j.nancom.2014.04.001

30. Jornet, J.M.; Pujol, J.C.; Pareta, J.S. (2012). PHLAME: un protocolo MAC consciente de la capa física para nanorredes electromagnéticas en la banda de terahercios = Phlame: A physical layer aware mac protocol for electromagnetic nanonetworks in the terahertz band. Nano Communication Networks, 3(1), pp. 74-81. https://doi.org/10.1016/j.nancom.2012.01.006

31. Kumar, M.R. (2019). Una nano-antena compacta basada en grafeno para la comunicación en nano-redes = A Compact Graphene Based Nano-Antenna for Communication in Nano-Network. Journal of the Institute of Electronics and Computer, 1(1), pp. 17-27. https://doi.org/10.33969/JIEC.2019.11003

32. Laajimi, R .; Niu, M. (2018). Nanoarchitecture of Quantum-Dot Cellular Automata (QCA) Using Small Area for Digital Circuits. Advanced Electronics Circuits – Principles, Architectures and Applications on Emerging Technologies, pp. 67-84. https://www.intechopen.com/chapters/58619

33. Lee, S.J.; Jung, C.; Choi, K.; Kim, S. (2015). Diseño de redes inalámbricas de nanosensores para aplicaciones intracuerpo = Design of wireless nanosensor networks for intrabody application. International Journal of Distributed Sensor Networks, 11(7), 176761. https://doi.org/10.1155/2015/176761

34. Lu, J.; Yeo, P.S.E.; Gan, C.K.; Wu, P.; Loh, K.P. (2011). Transformando moléculas C60 en puntos cuánticos de grafeno = Transforming C60 molecules into graphene quantum dots. Nature nanotechnology, 6(4), pp. 247-252. https://doi.org/10.1038/nnano.2011.30

35. Massicotte, M .; Yu, V .; Whiteway, E .; Vatnik, D .; Hilke, M. (2013). Quantum Hall effect in fractal graphene: growth and properties of graphlocons = Quantum Hall effect in fractal graphene: growth and properties of graphlocons. Nanotechnology, 24 (32), 325601. https://doi.org/10.1088/0957-4484/24/32/325601

36. Mitragotri, S .; Anderson, D.G .; Chen, X .; Chow, E.K .; Ho, D .; Kabanov, A.V .; Xu, C. (2015). Accelerating the translation of nanomaterials in biomedicine = Accelerating the translation of nanomaterials in biomedicine. ACS nano, 9 (7), pp. 6644-6654. https://doi.org/10.1021/acsnano.5b03569

37. Mohammadyan, S .; Angizi, S .; Navi, K. (2015). New fully single layer QCA full-adder cell based on feedback model. International Journal of High Performance Systems Architecture, 5 (4), pp. 202-208. https://doi.org/10.1504/IJHPSA.2015.072847

38. Mohrehkesh, S.; Weigle, M.C. (2014). Optimización del consumo de energía en nanorredes de banda de terahercios = Optimizing energy consumption in terahertz band nanonetworks. IEEE Journal on Selected Areas in Communications, 32(12), pp. 2432-2441. https://doi.org/10.1109/JSAC.2014.2367668

39. Mohrehkesh, S.; Weigle, M.C.; Das, S.K. (2015). DRIH-MAC: una MAC de recolección iniciada por un receptor distribuido para nanorredes = DRIH-MAC: A distributed receiver-initiated harvesting-aware MAC for nanonetworks. IEEE Transactions on Molecular, Biological and Multi-Scale Communications, 1(1), pp. 97-110. https://doi.org/10.1109/TMBMC.2015.2465519

40. Oh, D.K .; Jeong, H .; Kim, J .; Kim, Y .; Kim, I .; Ok, J.G .; Rho, J. (2021). Top-down nanofabrication approaches toward single-digit-nanometer scale structures. Journal of Mechanical Science and Technology, pp. 1-23. https://doi.org/10.1007/s12206-021-0243-7

41. Patriarchi, T .; Cho, J.R .; Merten, K .; Howe, M.W .; Marley, A .; Xiong, W.H .; Tian, L. (2018). Ultrafast neuronal imaging of dopamine dynamics with designed genetically encoded sensors. Science, 360 (6396). https://doi.org/10.1126/science.aat4422

42. Patriarchi, T.; Mohebi, A.; Sun, J.; Marley, A.; Liang, R.; Dong, C.; Tian, L. (2020). Una paleta ampliada de sensores de dopamina para imágenes multiplex in vivo = An expanded palette of dopamine sensors for multiplex imaging in vivo. Nature methods, 17(11), pp. 1147-1155. https://doi.org/10.1038/s41592-020-0936-3

43. Pierini, S. (2021). [Preprint]. Experimental study of perovskite nanocrystals as single photon sources for integrated quantum photonics = Experimental study of perovskite nanocrystals as single photon sources for integrated quantum photonics. Archive. https://arxiv.org/pdf/2105.14245.pdf

44. Pierobon, M .; Jornet, J.M .; Akkari, N .; Almasri, S .; Akyildiz, I.F. (2014). A routing framework for energy harvesting wireless nanosensor networks in the Terahertz Band. Wireless networks, 20 (5), pp. 1169-1183. https://doi.org/10.1007/s11276-013-0665-y

45. Pillers, M .; Goss, V .; Lieberman, M. (2014). Electron-beam lithography and molecular liftoff for directed attachment of DNA nanostructures on silicon: Top-down meets bottom-up = Electron-beam lithography and molecular liftoff for directed attachment of DNA nanostructures on silicon: Top-down meets bottom-up. Accounts of chemical research, 47 (6), pp. 1759-1767. https://doi.org/10.1021/ar500001e

46. Reis, D.A .; Torres, F.S. (2016). A Defects Simulator for Robustness Analysis of QCA Circuits. QCA = A Defects Simulator for Robustness Analysis of QCA Circuits. Journal of Integrated Circuits and Systems, 11 (2), pp. 86-96. https://doi.org/10.29292/jics.v11i2.433

47. Sadeghi, M .; Navi, K .; Dolatshahi, M. (2020). New efficient full adder and full subtractor designs in quantum cellular automata = Novel efficient full adder and full subtractor designs in quantum cellular automata. The Journal of Supercomputing, 76 (3), pp. 2191-2205. https://doi.org/10.1007/s11227-019-03073-4

48. Sardinha, L.H .; Costa, A.M .; Net, O.P.V .; Vieira, L.F .; Vieira, M.A. (2013). NanoRouter: a design of quantum dot cellular automata = Nanorouter: a quantum-dot cellular automata design. IEEE Journal on Selected Areas in Communications, 31 (12), pp. 825-834. https://doi.org/10.1109/JSAC.2013.SUP2.12130015

49. Sardine, L.H.; Silva, D.S.; Vieira, M.A.; Vieira, L.F.; Neto, O.P.V. (2015). TCAM / CAM-QCA: Content addressable memory (ternary) using quantum point cellular automata = Tcam/cam-qca:(ternary) content addressable memory using quantum-dot cellular automata. Microelectronics Journal, 46(7), pp. 563-571. https://doi.org/10.1016/j.mejo.2015.03.020

50. Sarveswaran, K. (2004). [Documento reservado]. Self-assembly and lithographic patterning of DNA rafts.DARPA Conf. Foundations of Nanoscience: Self-Assembled Architectures and Devices, Snowbird, UT. [Enlace no disponible]

51. Strukov, D.B.; Snider, G.S.; Stewart, D.R.; Williams, R.S. (2009). El memristor perdido, encontrado The missing memristor found. Nature, 459(7250), 1154. https://doi.org/10.1038/nature06932

52. Sun, F.; Zhou, J.; Dai, B.; Qian, T.; Zeng, J.; Li, X.; Li, Y. (2020). Sensores GRAB de próxima generación para monitorear la actividad dopaminérgica in vivo = Next-generation GRAB sensors for monitoring dopaminergic activity in vivo. Nature methods, 17(11), pp. 1156-1166. https://doi.org/10.1038

53. Suzuki, J.; Budiman, H.; Carr, T.A.; DeBlois, J.H. (2013). Un marco de simulación para la comunicación molecular basada en neuronas = A simulation framework for neuron-based molecular communication. Procedia Computer Science, 24, pp. 103-113. https://doi.org/10.1016/j.procs.2013.10.032

54. Tsioliaridou, A.; Liaskos, C.; Ioannidis, S.; Pitsillides, A. (2015). CORONA: un sistema de coordenadas y enrutamiento para nanorredes = CORONA: A Coordinate and Routing system for Nanonetworks. En: Proceedings of the second annual international conference on nanoscale computing and communication. pp. 1-6. https://doi.org/10.1145/2800795.2800809 | https://sci-hub.mksa.top/10.1145/2800795.2800809

55. Vassiliou, V. (2011). Problemas de seguridad en redes de comunicación a nanoescala = Security issues in nanoscale communication networks. 3rd NaNoNetworking Summit, pp. 1-53. tp://www.n3cat.upc.edu/n3summit2011/presentations/Security_Issues_in_Nanoscale_Communication_Networks.p

56. Vavouris, A.K .; Dervisi, F.D .; Papanikolaou, V.K .; Karagiannidis, G.K. (2018). An energy efficient modulation scheme for body-centric nano-communications in the THz band = An energy efficient modulation scheme for body-centric nano-communications in the THz band. In: 2018 7th International Conference on Modern Circuits and Systems Technologies (MOCAST) (pp. 1-4). IEEE. https://doi.org/10.1109/MOCAST.2018.8376563

57. Wang, Z.F .; Liu, F. (2011). Graphene quantum dots as building blocks for quantum cellular automata = Nanopatterned graphene quantum dots as building blocks for quantum cellular automata. Nanoscale, 3 (10), pp. 4201-4205. https://doi.org/10.1039/C1NR10489F

58. Wang, W.L .; Wang, C.C .; Yao, X.W. (2019). MAC protocol based on energy harvesting nano-networks = Slot self-allocation based mac protocol for energy harvesting nano-networks. Sensors, 19 (21), 4646. https://doi.org/10.3390/s19214646

59. Wang, Y .; Wu, Q .; Shi, W .; He, X .; Sun, X .; Gui, T. (2008). Radiation properties of carbon nanotubes antenna at terahertz / infrared range = Radiation properties of carbon nanotubes antenna at terahertz / infrared range. International Journal of Infrared and Millimeter Waves, 29 (1), pp. 35-42. https://doi.org/10.1007/s10762-007-9306-9

60. Xia, Y .; Qiu, K. (2008). Design and application of universal logic gate based on quantum-dot cellular automata. In: 2008 11th IEEE International Conference on Communication Technology (pp. 335-338). IEEE. https://doi.org/10.1109/ICCT.2008.4716260 | https://sci-hub.mksa.top/10.1109/ICCT.2008.4716260

61. Yao, X.W .; Wang, W.L .; Yang, S.H. (2015). Joint parameter optimization for perpetual nanonetworks and maximum network capacity. IEEE Transactions on Molecular, Biological and Multi-Scale Communications, 1 (4), pp. 321-330. https://doi.org/10.1109/TMBMC.2016.2564967

62. Yu, J.; Zhang, Y.; Yan, J.; Kahkoska, A.R.; Gu, Z. (2018). Advances in bioresponsive closed-loop drug delivery systems. International journal of pharmaceutics, 544(2), pp. 350-357. https://doi.org/10.1016/j.ijpharm.2017.11.064

63. Zarepour, E .; Hassan, M .; Chou, C.T .; Bayat, S. (2015). Performance analysis of carrier-less modulation schemes for wireless nanosensor networks. In: 2015 IEEE 15th International Conference on Nanotechnology (IEEE-NANO) (pp. 45-50). IEEE. https://doi.org/10.1109/NANO.2015.7388653

64. Zhang, R .; Yang, K .; Abbasi, Q.H .; Qaraqe, K.A .; Alomainy, A. (2017). Analytical characterization of the terahertz in-vivo nano-network in the presence of interference based on TS-OOK communication scheme. IEEE Access, 5, pp. 10172-10181. https://doi.org/10.1109/ACCESS.2017.2713459

You NPC's have been warned: 'TECH INDUSTRY INSIDER HERE - PREPARE FOR WHAT IS COMING'

"I'm not going to mention my position or company in order to maintain anonymity. This is what they are planning for humanity through the past and future applications of vaccines:

The vaccine created nano bots out of your own cells. There is a program language that's been created to write instructions delivered by mRNA via crispr technology to replace existing mRNA with these programed instructions to cause your cells to create biological transistors and spike proteins (for depopulation first). Microsoft has the programming language since 2016. The effects we are seeing now are a result of bodies rejecting bad code. The vaccine isn't perfected yet and bodies are needed for testing. This will be perfected in a short time. Digital ID is the goal. Your cells will store the ID and you will be readable much like having RFID chip.
One unique digital signature to rule all aspects of one's life. Most people thought RFID chips would be the mark. They were right except wrong about what that would look like. One could easily remove a chip from the arm by a professional or doctor. RFID is secure if it is delivered by your cells which cannot be removed from the body."

"With Digital ID if you do not participate you will not have the ability to buy or sell. The capability will be lost as all stores will have readers that can scan your bodies electro field you are giving off from your cells. No wallet necessary to carry cash. Your digital id is unique to you and unhackable. A digital currency value is tied to your body forever. No hiding money under the table, no privacy in transacting. If you have wrongthink they can zero out your money value. If you do not take it you are on your own for everything. No money. No life. You won't have property because you won't be able to pay taxes on already owned property. They will seize it from you. They will use marked people to remove your land from you by force or they will lose their land. They will be pitted against you. So you see. The vaccine is the mark but the carrier or medium for the digital id which already carries a unique id or mark has already been administered. It's just the outside scanners, systems, databases, etc. had not all been tied together fully yet and implemented to that. They have to get us to accept that part as well.

I think we should definitely be prepared for some type of collapse of the world economy, and after much chaos and destruction, in order to re-enter, you will need a digital ID - but not without changing your DNA first."

REPLIES

"You will not be able to do anything without this digital ID encoded into your cells and your DNA. They don't need everyone to take it. If 70-80% of the people take it, that's enough to create essentially an army of loyal slaves that are attached to their system in the deepest ways. Those guys will arrest you, take your property, or even enslave/kill you.
-
They need something to usher in this new system of living and governance. That aspect of this whole plan, I honestly don't know how they'll implement it. I think it has a lot to do with starvation and drought. They vaguely mention that sometimes.
-
You two need to realize how many people worldwide got a needle containing instructions and material for self-replicating nanorouters shoved into their arms in the last 4 years. It's most of humanity. There will be more fake "pandemics" in the future to get more of the stragglers to take the vaccine or

disconnect from society. The fake pandemics will get more and more intense in regards to the severity of whatever virus or bacteria they've intentionally spread around the globe. There will be a point where you will NEED to take the vaccine.

The vaccine will serve as a means of getting your body to produce its own unique digital ID and as a way of actually preventing you from dying due to whatever they've cooked up in the future. I'm not exaggerating when I say that you will take a vaccine, if you haven't already, sometime in the future. The alternative is to completely isolate yourself from society which will, in reality regardless of your little fantasies, actually make you extremely vulnerable.

Stop thinking about projects like they're run by one independent cabal of demons sitting around a table and managing everyone by themselves with no outside help. The people, companies, organizations, and governments who have developed this and are working on implementing it are all a syndicate across a broad spectrum. The whole project is a syndication of converging interests. Companies, organizations, elites, government, etc, all benefit from everyone having a unique digital ID. There's money to make here. There's control to gain here. That's why you and I will lose in the end."

REPLIES

"Here's the thing, anon: they will be. They will tell you their intentions. They're planning to do just that. They will come out to the world and proclaim their discovery of a new way to cure certain kinds of cancers or other previously incurable illnesses or disabilities. The people will be informed of how this technology (mRNA editing and nanotechnology) works and they'll genuinely be upfront about it because you can't really hide a thing like this where everyone can detect it in a lab or someone's bloodstream.

But, they won't tell you about their intentions. This technology can bring a lot of good into the world by curing pretty much all illnesses or disease. It's a double edged sword.
-
Everyone's digital ID will be unique just like how everyone's DNA is unique.
-
Ugh, you're so short-sighted, anon. Everything is already primed for this leap into the Internet of Bodies concept. You are already connected to a massive cloud. Now, they want to ensure that you have a unique ID that cannot be spoofed or obscured.
-
But, they won't tell you about their *true* intentions.
-
The thing is you don't have the apparatus they have.
-
The goal is to simply read what your body is signaling. Electricity is needed."

END.

Written in April 2020

We’re in an Extinction Level Event killing all biological life forms including humans, animals and plants.

Graphene Quantum Dot Hydrogel=The “PARTICLE “.

tainting all biological life forms including humans, animals and plants.

A Nanofusion of biological life and robotic construct.

Nanobot Hollow belly WITH PAYLOAD CAPABILITY ABLE TO CONTAIN REAL VIRUS..EG..MARBURG..AND RELEASE ON DEMAND AT THE RIGHT SIGNAL FREQUENCY.

Thread: Study Reveals 5G Signals Activates Payloads From Graphene Oxide Injected Into The Body

CONNECTS YOU TO ARTIFICIAL INTELLIGENCE COMPUTER CONTROL.

Infiltrates your brain changes your DNA.

-WILLINGLY Surrendering your humanity to vax/testing =

the PARTICLE in your body NEVER to be removed=your body becomes a

-AI YOKE OF HUMANITY KILL SYSTEM.

-Genetic modification of ALL biological life forms on earth. Including humans, animals and plants.

– SOFT ROBOTS=Nano and biological tissue engineering. –

ALL PARTS THAT MAKE YOU HUMAN ARE REMOVED.

Rewired retooled body = no longer human. –

Will I allow myself to become a synthetic entity?!!!

NEVER allow Graphene Quantum Dot Hydrogel into your body via vax/swab testing deposits.

-Once vaccinated your body becomes bioreactor manufacturing the “PARTICLE “ which you will continue to “shed” to others and your environment!

-IT IS NOT SAFE TO BE NEAR THOSE VACCINATED AND SHEDDING!!!

-URGENTLY important to keep your home a safe haven!!!

NO ONE ALLOWED TO ENTER WHO’S BEEN VACCINATED AND SHEDDING THE PARTICLE!!! –

ALL FOODS COMPROMISED SYNTHETICALLY WITH PARTICLE BY END OF 2021!!!

Learn to garden NOW!!! –

Military = need to get rid of all humans by 2025.

Will be bringing in “new” humans lab created with no soul, no spirit. – Bionary weapons in foods. –

PURPOSE TO POSITION YOURSELF TO SAY NO!!!

To Graphene Quantum Dot Hydrogel deposits via swab testing/vaccine and now in paper masks/foods.

Prepare to walk in consequences of saying no=

lost jobs,
no income,
no shelter,
close family/friend mocking,
scoffing,anger, hostility, separation has begun!

Only one third of humanity will survive Technology Extinction Level Event!!!

https://godlike.com/forum1/message5642515/pg1